

## INSULATED SHAFT ENCODERS



### ■ Features

- High-precision sliding type encoder.
- Compact design, long life and high reliability.
- Low cost as compared with optical type.
- Available in a wide variety of lineup to meet all user needs.

### ■ Applications

- All kinds of level control, tuning and timer setting in audio-visual equipment, ordinary household electric appliances, radio equipment, communications equipment, etc.

### ■ Products Line

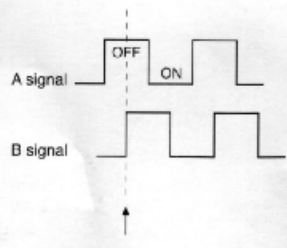
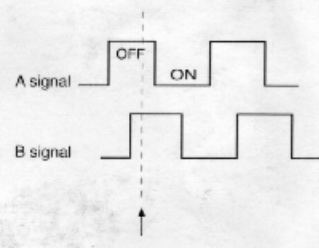
Size	Model	pulses /rotation		Output signal	Rotational angle	Rotational life(cycles)	Mounting method	Other
		With detent	With out detent					
12 mm	ED 12	12	12	phase difference in output of 2 signals. A and B	360° (Endless)	30,000	With collar /snap-in	Insulated shaft With push-on switch
		24	24					
16 mm	ED 16	12	12	phase difference in output of 2 signals. A and B	360° (Endless)	100,000	Fastened with bushing unit /snap-in	Insulated shaft With push-on switch
		24	24					

# INSULATED SHAFT ENCODERS

## ■ Mechanical characteristics

Item	ED 12	ED 16
Total rotational angle	360°	360°
Rotational torque	3 ~ 20 mN.m 30 ~ 200gf.cm	3 ~ 24 mN.m 30 ~ 240gf.cm
Shaft push-pull strength	50N / 5.1kgf max.	

## ■ Electrical characteristics


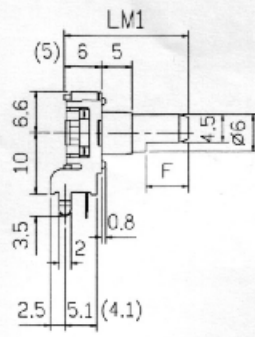
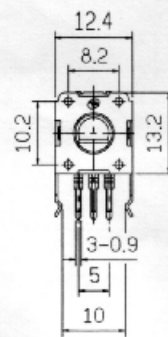
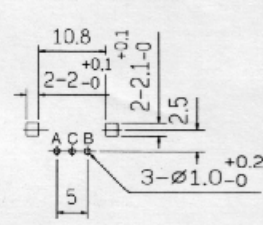

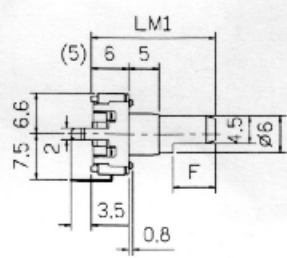

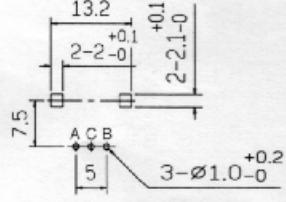

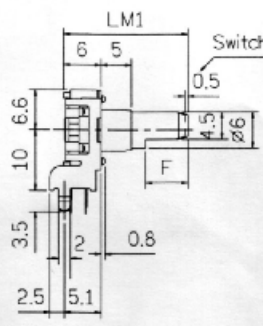
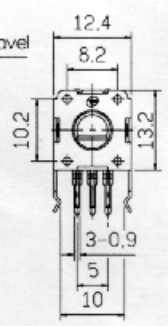
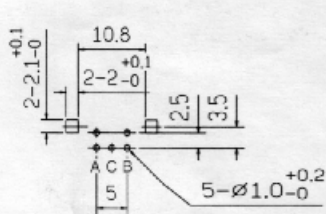

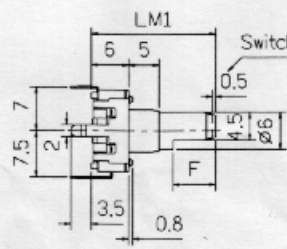

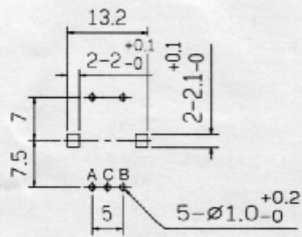
Ratings power	5V DC. 0.5mA (Each Bit)	
Phase-difference	$\Delta T = 0.08T$ min.	$\Delta T = 0.15T \pm 0.1T$ or $0.25T \pm 0.1T$
Insulation resistance	50V DC 100M $\Omega$ min	
Voltage proof	50V AC	
Sliding noise	t1, t3 $\leq$ 3ms t2 $\leq$ 2ms (Test conditions 360°/s)	
Output signal and rotational direction	 <p>Detent stability point CW direction</p>	 <p>Detent stability point CW direction</p>

## ■ Push-on switch specifications

Switch circuit	Single pole and single throw (push on)
Travel of switch (mm)	0.5 $\begin{matrix} +0.4 \\ -0.3 \end{matrix}$
Operating force of switch	3 $\begin{matrix} +1.5 \\ -1.0 \end{matrix}$ N / 360 $\begin{matrix} +150 \\ -100 \end{matrix}$ gf
Ratings power	DC 5V 10mA (minimum ratings DC 5V 1mA)
Contact resistance	First period: 100m $\Omega$ , 200m $\Omega$ after the end of useful life is reached
Operating life	20,000 cycles min.


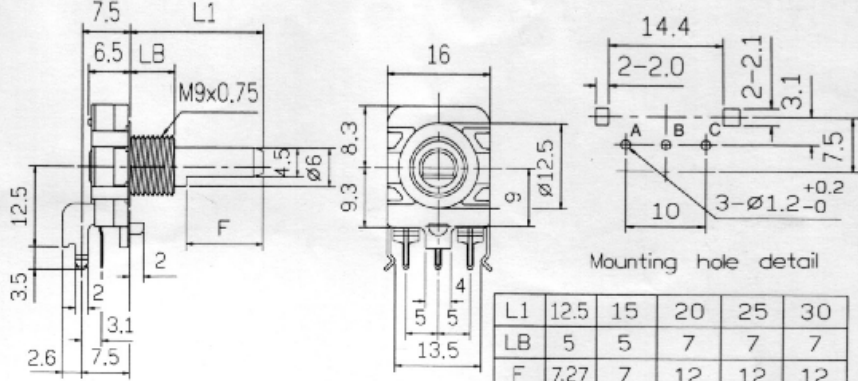

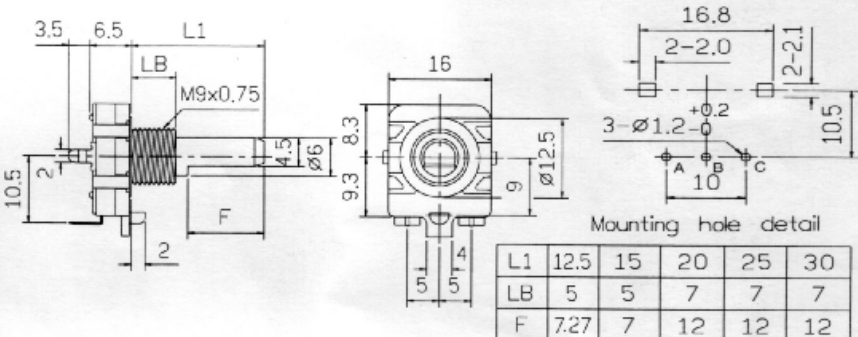

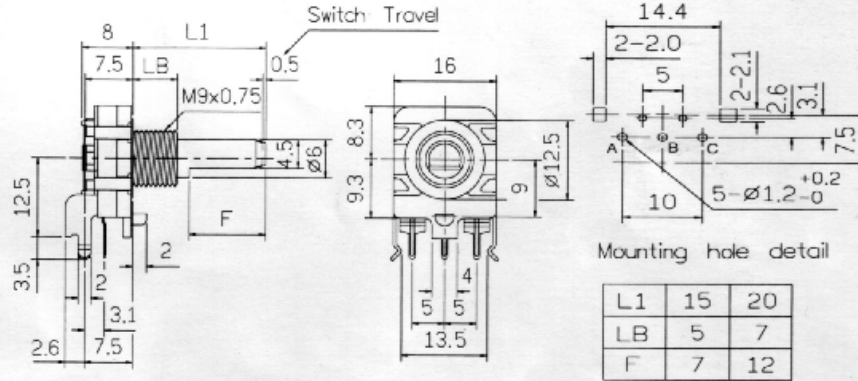

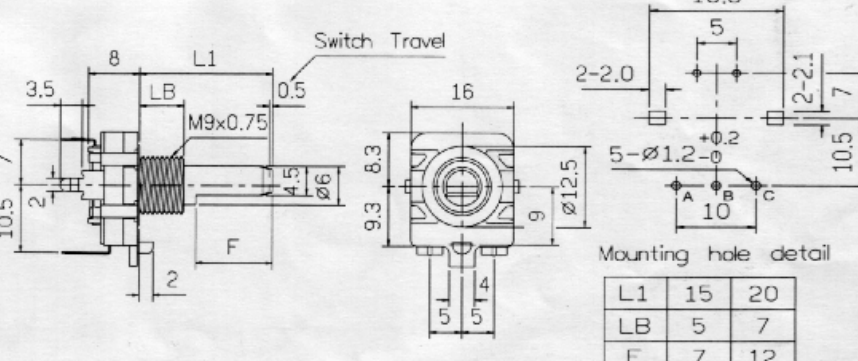
# INSULATED SHAFT ENCODERS

## ■ 12mm Size Snap-in Insulated Shaft Encoder

Model	Dimensions												
<p><b>ED1211 (3)</b> 12mm Size Horizontal Type Encoder</p> 			 <p>Mounting hole detail</p> <table border="1" data-bbox="1157 739 1388 806"> <tr> <td>LM1</td> <td>17.5</td> <td>20</td> <td>25</td> </tr> <tr> <td>F</td> <td>5.0</td> <td>7</td> <td>12</td> </tr> </table>	LM1	17.5	20	25	F	5.0	7	12		
LM1	17.5	20	25										
F	5.0	7	12										
<p><b>ED1212 (4)</b> 12mm Size Vertical Type Encoder</p> 			 <p>Mounting hole detail</p> <table border="1" data-bbox="1157 1153 1388 1220"> <tr> <td>LM1</td> <td>17.5</td> <td>20</td> <td>25</td> </tr> <tr> <td>F</td> <td>5.0</td> <td>7</td> <td>12</td> </tr> </table>	LM1	17.5	20	25	F	5.0	7	12		
LM1	17.5	20	25										
F	5.0	7	12										
<p><b>ED1211S</b> 12mm Size Horizontal Type Encoder With Push-on Switch</p> 			 <p>Mounting hole detail</p> <table border="1" data-bbox="1109 1556 1388 1624"> <tr> <td>LM1</td> <td>17.5</td> <td>20</td> <td>25</td> <td>30</td> </tr> <tr> <td>F</td> <td>5.0</td> <td>7</td> <td>12</td> <td>12</td> </tr> </table>	LM1	17.5	20	25	30	F	5.0	7	12	12
LM1	17.5	20	25	30									
F	5.0	7	12	12									
<p><b>ED1212S</b> 12mm Size Vertical Type Encoder With Push-on Switch</p> 			 <p>Mounting hole detail</p> <table border="1" data-bbox="1109 1971 1388 2038"> <tr> <td>LM1</td> <td>17.5</td> <td>20</td> <td>25</td> <td>30</td> </tr> <tr> <td>F</td> <td>5.0</td> <td>7</td> <td>12</td> <td>12</td> </tr> </table>	LM1	17.5	20	25	30	F	5.0	7	12	12
LM1	17.5	20	25	30									
F	5.0	7	12	12									



## ■ 16mm Size Snap-in Insulated Shaft Encoder

Model	Dimensions																		
<p><b>ED1611</b> 16mm Size Horizontal Type Encoder</p> 	 <table border="1" data-bbox="1050 739 1412 840"> <tr> <td>L1</td> <td>12.5</td> <td>15</td> <td>20</td> <td>25</td> <td>30</td> </tr> <tr> <td>LB</td> <td>5</td> <td>5</td> <td>7</td> <td>7</td> <td>7</td> </tr> <tr> <td>F</td> <td>7.27</td> <td>7</td> <td>12</td> <td>12</td> <td>12</td> </tr> </table>	L1	12.5	15	20	25	30	LB	5	5	7	7	7	F	7.27	7	12	12	12
L1	12.5	15	20	25	30														
LB	5	5	7	7	7														
F	7.27	7	12	12	12														
<p><b>ED1612</b> 16mm Size Vertical Type Encoder</p> 	 <table border="1" data-bbox="1050 1153 1412 1254"> <tr> <td>L1</td> <td>12.5</td> <td>15</td> <td>20</td> <td>25</td> <td>30</td> </tr> <tr> <td>LB</td> <td>5</td> <td>5</td> <td>7</td> <td>7</td> <td>7</td> </tr> <tr> <td>F</td> <td>7.27</td> <td>7</td> <td>12</td> <td>12</td> <td>12</td> </tr> </table>	L1	12.5	15	20	25	30	LB	5	5	7	7	7	F	7.27	7	12	12	12
L1	12.5	15	20	25	30														
LB	5	5	7	7	7														
F	7.27	7	12	12	12														
<p><b>ED1611S</b> 16mm Size Horizontal Type Encoder With Push-on Switch</p> 	 <table border="1" data-bbox="1157 1568 1356 1668"> <tr> <td>L1</td> <td>15</td> <td>20</td> </tr> <tr> <td>LB</td> <td>5</td> <td>7</td> </tr> <tr> <td>F</td> <td>7</td> <td>12</td> </tr> </table>	L1	15	20	LB	5	7	F	7	12									
L1	15	20																	
LB	5	7																	
F	7	12																	
<p><b>ED1612S</b> 16mm Size Vertical Type Encoder With Push-on Switch</p> 	 <table border="1" data-bbox="1157 1982 1356 2083"> <tr> <td>L1</td> <td>15</td> <td>20</td> </tr> <tr> <td>LB</td> <td>5</td> <td>7</td> </tr> <tr> <td>F</td> <td>7</td> <td>12</td> </tr> </table>	L1	15	20	LB	5	7	F	7	12									
L1	15	20																	
LB	5	7																	
F	7	12																	