
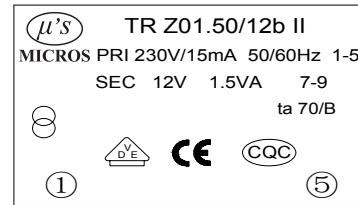
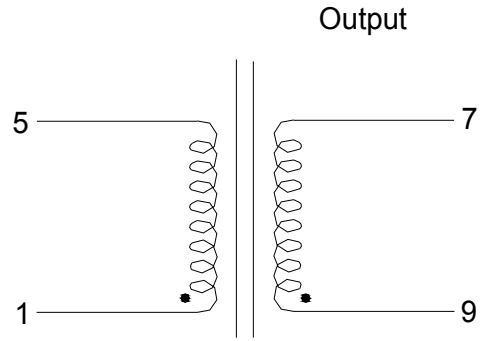

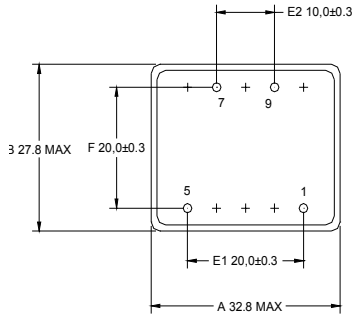



TR Z01.50/12b II

OUTLINE DRAWING: UNIT: mm

SCHEMATIC: Input

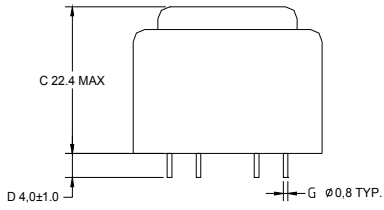

ELECTRICAL SPECIFICATION:

ITEM	TERMINAL	SPECIFICATION	TEST CONDITION	TEST INSTRUMENTS
EXCITATION CURRENT (mA)	1--5	12 MAX	Input: (1--5) 230V 50Hz	GDW 4033A
LOSS POWER(W)	1--5	0.9 MAX		
Load Voltage (V)	7--9	12.3 ±10% @ 125mA		
No-Load Voltage(V)	7--9	19.3 Max		
RESISTANCE (Ω)	1--5	3000±10%	Ta=25°C	TH2512B
	7--9	28.6±15%		
INSULATION RESISTANCE	P--S	100MΩ MIN	DC500V /1min	CS5603
HI-POT	P--S	4200V 1mA 1s	50Hz	