


Customer 's name 客户名称：					Customer recognizes 客户承认：	
NO. 序号	Specified voltage and frequency 额定电压及频率	Specified capacity and capacity deviation 额定电容及电容偏差	Over all dimension 外形尺寸 (mm) ( $\phi D \times H$ ) $\pm 0.5$	Remark 备注		
1	450VAC 50/60Hz	1 $\mu$ F $\pm 10\%$	30 $\times$ 57M8			
2	450VAC 50/60Hz	2.5 $\mu$ F $\pm 10\%$	30 $\times$ 57M8			
3	450VAC 50/60Hz	3 $\mu$ F $\pm 10\%$	30 $\times$ 57M8			
4	450VAC 50/60Hz	4 $\mu$ F $\pm 10\%$	30 $\times$ 57M8			
5	450VAC 50/60Hz	6 $\mu$ F $\pm 10\%$	30 $\times$ 57M8			
Carry out standard 推行标准		GB 3667.1-2016/IEC60252-1: 2013				
Operating temp range 使用温度范围		-25 $\sim$ +70 $^{\circ}$ C	Lifespan garden 寿命等级	C CLASS		
Withstanding standard 耐电压		Between terminals 端子相互间	2.0UN 2S无击穿及飞弧现象			
		Terminals to case 端子与外壳间 (金属外壳)	-----			
Capacitance tolerance 电容偏差		$\pm 10\%$				
Loss angle tangent 损耗角正切		$\leq 0.0020$ (100 Hz)				
整 体	Shape 外形	See right picture 见右图				
	Condenser fuse 电容器芯子	Have self-healing 具有自愈性				
结	Case 外壳	White of plastics outer shell 白色塑料外壳			drafts system: 拟制：林海燕	Name: CBB60 metallized polypropylene film capacitor. 名称：CBB60型金属化聚丙烯薄膜电容器

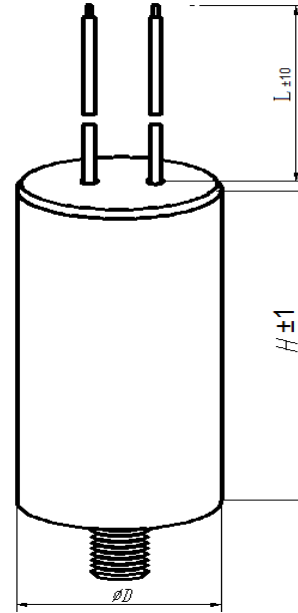

构	Terminals 引出	2.5-2.8mm <sup>2</sup> black wire	Approval 核准:	Wenling jiyang capacitor co.,LTD 温岭市嘉洋电容器有限公司
	Filling 填充料	Epoxy resin 环氧树脂		