

1 2 3 4 5 6 7 8

A

A

B

B

C

C

D



D

E

E

F

F

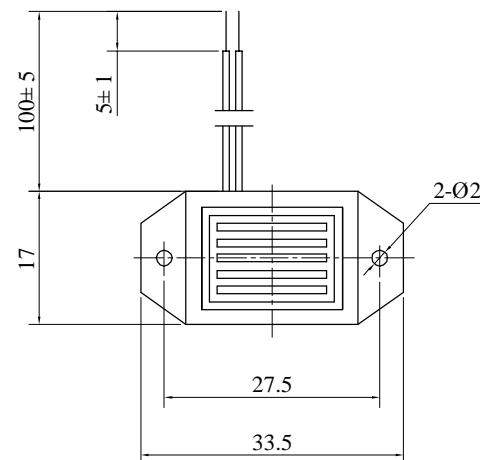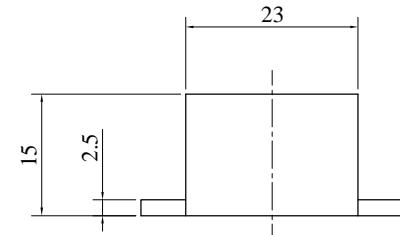

SPECIFICATION

1. Rated Voltage 24VDC
2. Operating Voltage 15~27VDC
3. Max. Rated Current 30mA at 24VDC
4. Resonant Frequency 400±100Hz
5. Min. Sound Pressure Level 80dB at 24VDC/20cm
6. Case Material ABS
7. Operating Temperature -20~+60°C
8. Store Temperature -30~+70°C
9. Weight 8g

No.	DESCRIPTION	APPROVED	CFGM24		
			APPROVALS	DATE	UNIT
X	NOTED OTHERWISE	DRAWN			mm
XX	±	CHECKED			
XXX	+				
90°	FORMED +2°				
	ANGLES -1°				
FIRST ANGLE PROJECTION		APPROVED	SCALE		VER

1 2 3 4 5 6 7 8