


1 2 3 4 5 6 7 8


A




B

SPECIFICATION


C

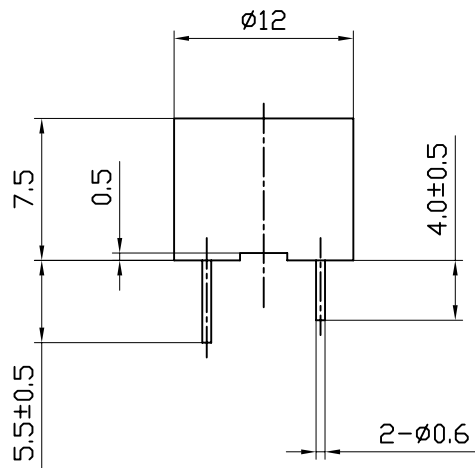

D



E



F

- 1. Rated Voltage 3VDC
- 2. Operating Voltage 2~5VDC
- 3. Max. Rated Current 30mA/3VDC
- 4. Min. Sound Pressure Level 85dB/10cm
- 5. Resonant Frequency 3100±500Hz
- 6. Response Time 50ms
- 7. Case Material PBT
- 8. Operating Temperature -20~+70°C
- 9. Store Temperature -30~+80°C
- 10. Weight 2g

				Compliance with ROHS	
				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
No.		DESCRIPTION	APPROVED	DATE	
TOLERANCES UNLESS NOTED OTHERWISE			APPROVALS	DATE	
X ±				UNIT	
.XX ±				DWG NO.	
.XXX ±				mm	
90° FORMED ±1°				SCALE	
ANGLES -1°				NOT TO SCALE	
FIRST ANGLE PROJECTION				SHEET	
		APPROVED	07.08.16	VER 1.1	
				OEM1664R	
				Magnetic Buzzer MICROS KPX-G1203B-1664	

1 2 3 4 5 6 7 8