

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D





D

E

E

F

F

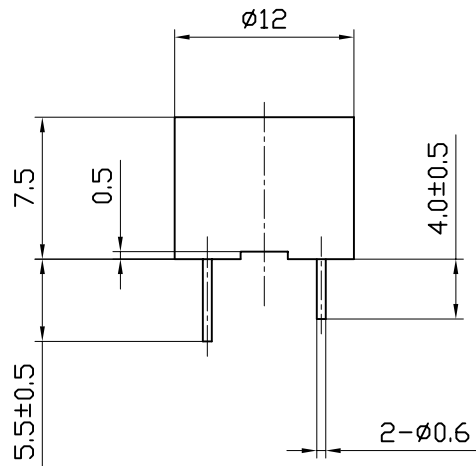

SPECIFICATION

- 1. Rated Voltage 12VDC
- 2. Operating Voltage 8~15VDC
- 3. Max. Rated Current 30mA/12VDC
- 4. Min. Sound Pressure Level 85dB/10cm
- 5. Resonant Frequency 3100±500Hz
- 6. Response Time 50ms
- 7. Case Material PBT
- 8. Operating Temperature -20~+70°C
- 9. Store Temperature -30~+80°C
- 10. Weight 2g

				Compliance with RoHS	
				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
No.		DESCRIPTION	APPROVED	DATE	UNIT
TOLERANCES UNLESS NOTED OTHERWISE		APPROVALS		DATE	DWG NO.
X	±	DRAWN	LXB	07.08.16	mm
.XX	±	CHECKED	LXB	07.08.16	
.XXX	±	APPROVED	WDY	07.08.16	
90° FORMED ANGLES		FIRST ANGLE PROJECTION		SCALE	SHEET
				NOT TO SCALE	OEM1666R
				VER	1.2

1

2

3

4

5

6

7

8